


Specifications and Installation Guide

B880-Eco Wall Hung Vanity Collection

Models

- B880-24-002-XX
- B880-30-002-XX
- B880-36-002-XX
- B880-48C-002-XX
- B880-60D-002-XX
- B880-72D-002-XX

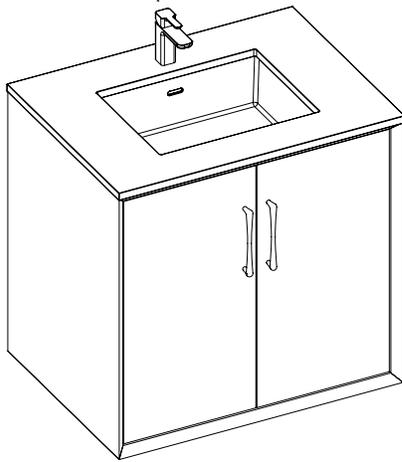

B890-Homage Free Standing Vanity Collection

- B890-24-001-XX
- B890-30-001-XX
- B890-36-001-XX
- B890-48C-001-XX
- B890-60D-001-XX
- B890-72D-001-XX

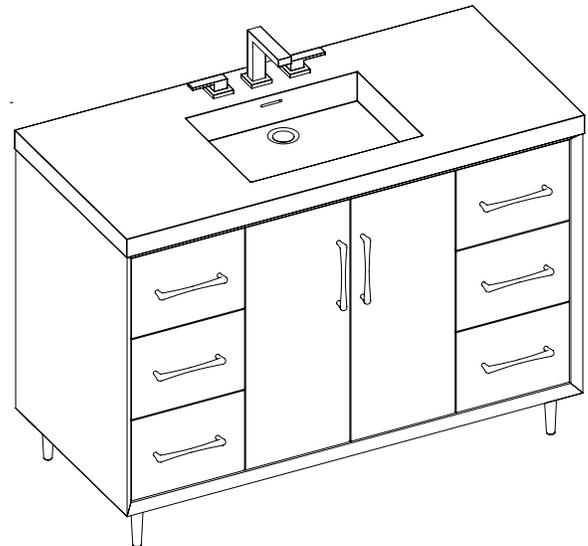


Table of Contents

	Page / Page
Specifications 24/30.....	2
Specifications 36.....	3
Specifications 48C.....	4
Specifications 60D/72D.....	5
Typical Installation: Wall Hung /B880-Eco.....	6
Installation Steps: Wall Hung /B880-Eco.....	7-8
Feet/Base Installation: Free Standing /B890-Homage.....	9
Typical Installation: Free Standing /B890-Homage.....	10
Center (Adjustable) Feet Installation: Free Standing /B890-48C/60D/72D-Homage.....	11
Handle Installation and Door Panel Adjustment.....	12

For clarification, please contact Madeli Customer Care at (800) 819-6988 Ext.1 or service@madeli.com
 Pour plus de précisions, veuillez contacter le service client Madeli au (800) 819-6988 Ext.1 ou service@madeli.com

Eco/Homage - 24"/30" - Single Bowl

Cabinet Specifications

Features


- Eco-Wall hung vanity or Homage-Free Standing Vanity
- Furniture grade plywood or moisture-resistant wood composite construction
- Finished with a sealed, decorative veneer or with premium polyurethane solid color paints
- Two doors with soft-close hardware.
- One interior drawer with full-extension soft-close hardware.
- In-Cabinet Electrical Outlet (4 outlets, 2 USB-A and 1 USB-C)
- 5.5" center-to-center predrilled holes for handles.
- Feet and handles furnished separately for field installation.
- Handle/Feet finish options: polished chrome (PC), brushed nickel (BN), polished nickel (PN), matte black (MB) and satin brass (SB)

Top/Basin options


- Glossy White X-Stone 2"H top/basin
- Glossy White X-Stone 4-1/2" H Trough sink
- Quartzstone 3/4"H countertop with undermount ceramic basin
- Quartzstone 3"H countertop with undermount ceramic basin

Drawer Boxes



- Matching color for solid color units
- Solid wood with dovetail joints for decorative veneer units

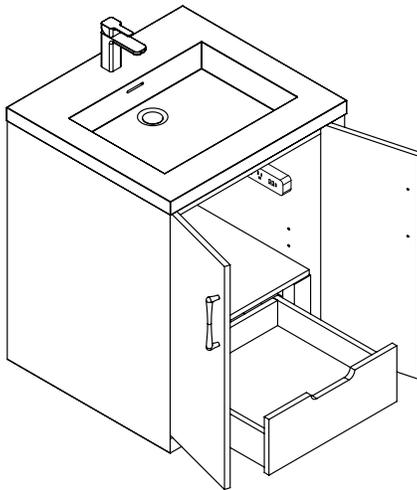

SIDE VIEW

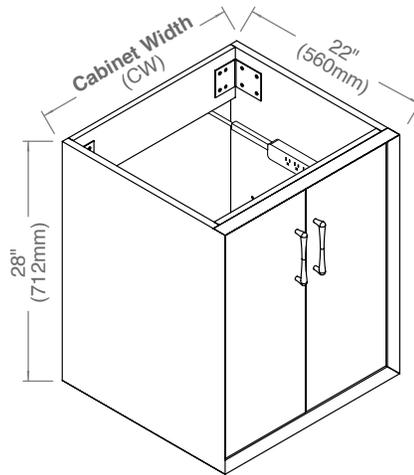

TOP VIEW

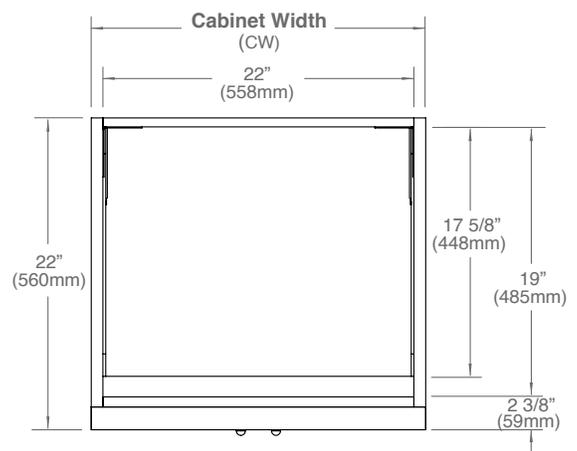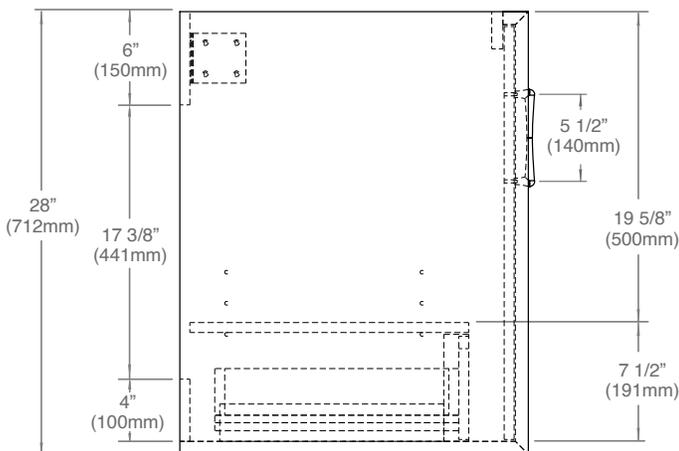

MODEL	CW	Handle Center-To-Center	Package Dimensions	Weight
B880/B890-24-00X-XX	23 5/8" (600mm)	5 1/2" (140mm)	28"(711) x 26"(660) x 32 1/2"(826)	110 lbs / 50 Kgs
B880/B890-30-00X-XX	29 5/8" (753mm)	5 1/2" (140mm)	34"(864) x 26"(660) x 32 1/2"(826)	130 lbs / 59 Kgs

For clarification, please contact Madeli Customer Care at (800) 819-6988 Ext.1 or service@madeli.com

All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice. Find latest revision on madeli.com.

Eco/Homage - 36" - Single Bowl

Cabinet Specifications

Features

- Eco-Wall hung vanity or Homage-Free Standing Vanity
- Furniture grade plywood or moisture-resistant wood composite construction
- Finished with a sealed, decorative veneer or with premium polyurethane solid color paints
- Two doors with soft-close hardware.
- One interior drawer with full-extension soft-close hardware.
- Three side drawers with full-extension soft-close hardware.
- In-Cabinet Electrical Outlet (4 outlets, 2 USB-A and 1 USB-C)
- 5.5" center-to-center predrilled holes for handles.
- Feet and handles furnished separately for field installation.
- Handle/Feet finish options: polished chrome (PC), brushed nickel (BN), polished nickel (PN), matte black (MB) and satin brass (SB)

Top/Basin options

- Glossy White X-Stone 2"H top/basin
- Glossy White X-Stone 4-1/2" H Trough sink
- Quartzstone 3/4"H countertop with undermount ceramic basin
- Quartzstone 3"H countertop with undermount ceramic basin

Drawer Boxes



- Matching color for solid color units
- Solid wood with dovetail joints for decorative veneer units

Package Dimensions

40"(1016) x 26"(660) x 32 1/2"(826)



Weight

145 lbs / 66 Kgs

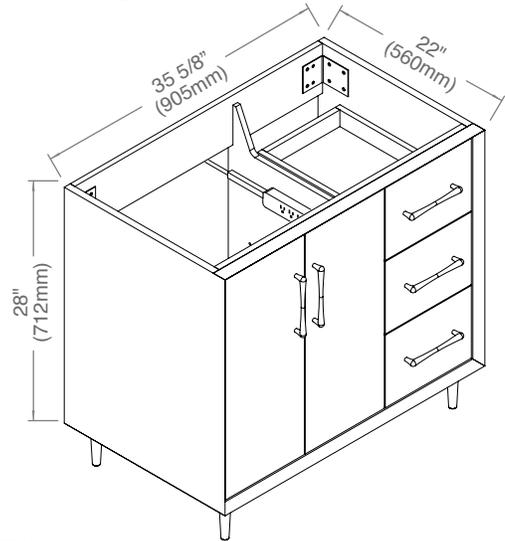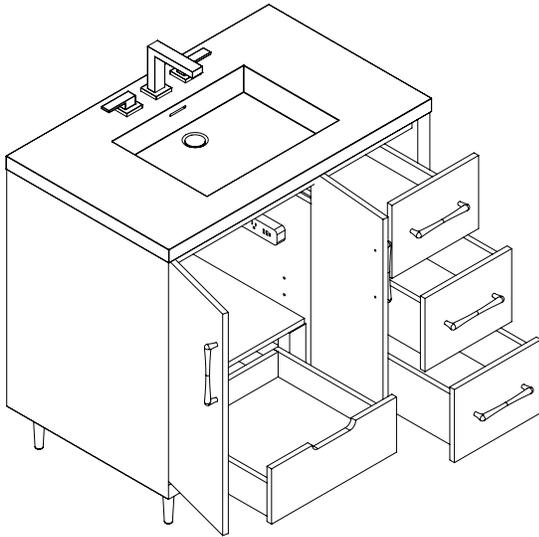

SIDE VIEW

TOP VIEW

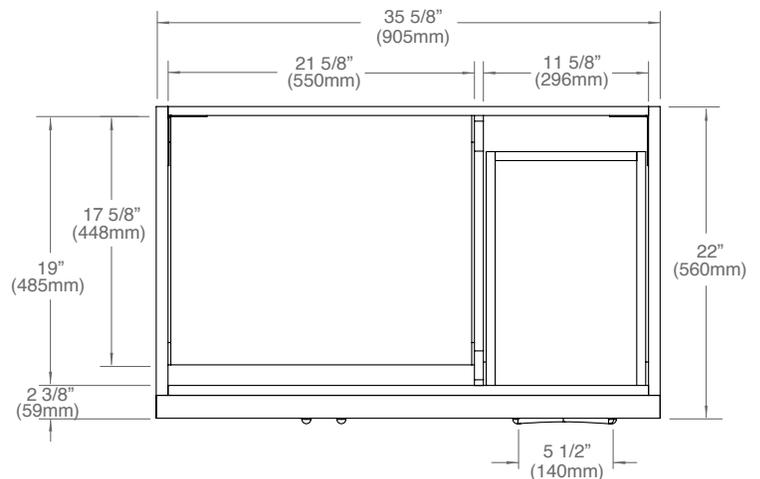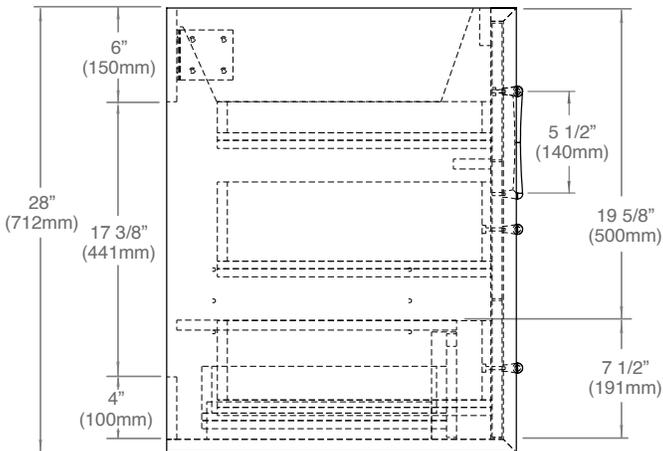

For clarification, please contact Madeli Customer Care at (800) 819-6988 Ext.1 or service@madeli.com

All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice. Find latest revision on madeli.com.

Eco/Homage - 48" - Single Bowl

Cabinet Specifications

Features

- Eco-Wall hung vanity or Homage-Free Standing Vanity
- Furniture grade plywood or moisture-resistant wood composite construction
- Finished with a sealed, decorative veneer or with premium polyurethane solid color paints
- Two doors with soft-close hardware.
- One interior drawer with full-extension soft-close hardware.
- Six side drawers with full-extension soft-close hardware.
- In-Cabinet Electrical Outlet (4 outlets, 2 USB-A and 1 USB-C)
- 5.5" center-to-center predrilled holes for handles.
- Feet and handles furnished separately for field installation.
- Handle/Feet finish options: polished chrome (PC), brushed nickel (BN), polished nickel (PN), matte black (MB) and satin brass (SB)

Top/Basin options

- Glossy White X-Stone 2"H top/basin
- Glossy White X-Stone 4-1/2" H Trough sink
- Quartzstone 3/4"H countertop with undermount ceramic basin
- Quartzstone 3"H countertop with undermount ceramic basin

Drawer Boxes


- Matching color for solid color units
- Solid wood with dovetail joints for decorative veneer units

Package Dimensions


52"(1321) x 26"(660) x 32 1/2"(826)

Weight



172 lbs / 78 Kgs

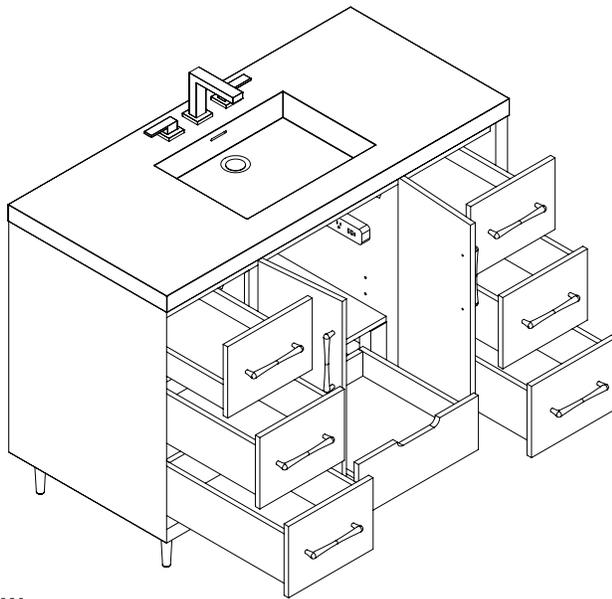

SIDE VIEW

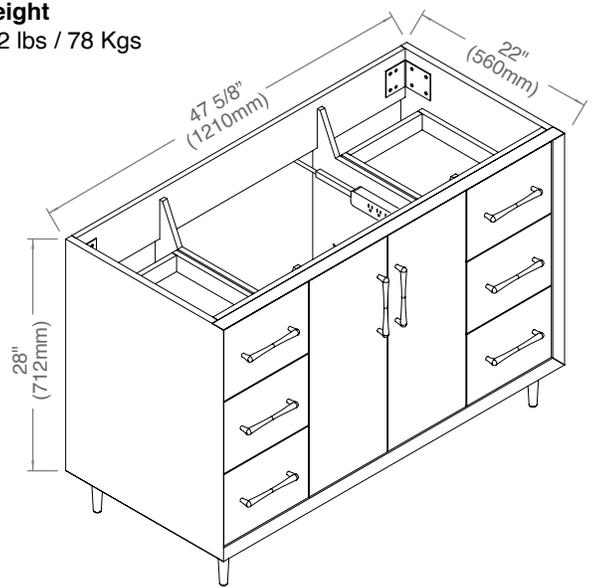

TOP VIEW

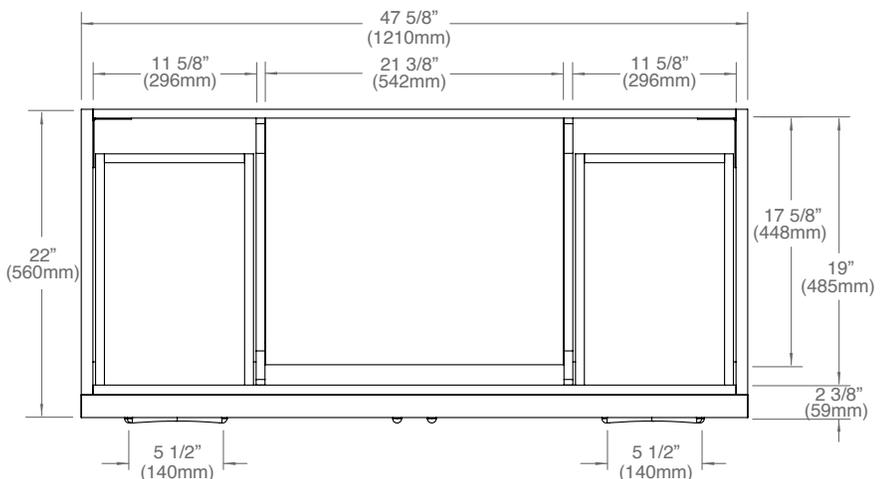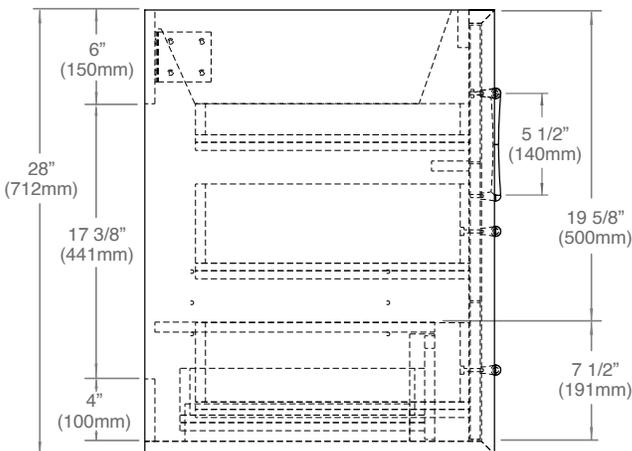

For clarification, please contact Madeli Customer Care at (800) 819-6988 Ext.1 or service@madeli.com

All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice. Find latest revision on madeli.com.

Eco/Homage - 60D/72D - Single Bowl

Cabinet Specifications

Features


- Eco-Wall hung vanity or Homage-Free Standing Vanity
- Furniture grade plywood or moisture-resistant wood composite construction
- Finished with a sealed, decorative veneer or with premium polyurethane solid color paints
- Two doors with soft-close hardware.
- One interior drawer with full-extension soft-close hardware.
- Six side drawers with full-extension soft-close hardware.
- In-Cabinet Electrical Outlet (4 outlets, 2 USB-A and 1 USB-C)
- 5.5" center-to-center predrilled holes for handles.
- Feet and handles furnished separately for field installation.
- Handle/Feet finish options: polished chrome (PC), brushed nickel (BN), polished nickel (PN), matte black (MB) and satin brass (SB)

Top/Basin options


- Glossy White X-Stone 2"H top/basin
- Glossy White X-Stone 4-1/2" H Trough sink
- Quartzstone 3/4"H countertop with undermount ceramic basin
- Quartzstone 3"H countertop with undermount ceramic basin

Drawer Boxes



- Matching color for solid color units
- Solid wood with dovetail joints for decorative veneer units

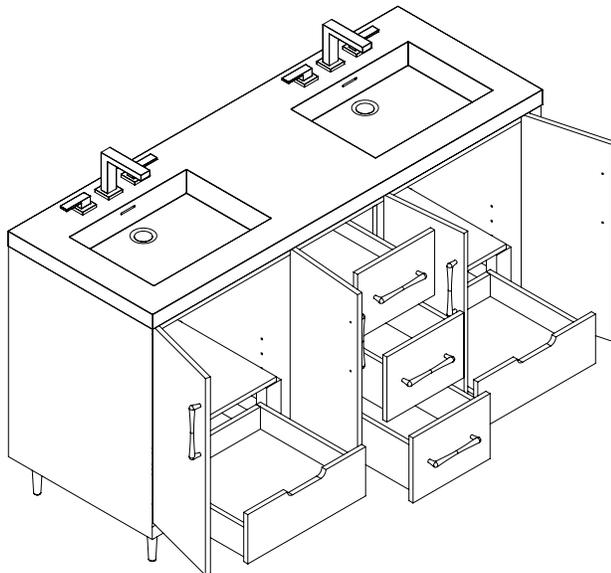

SIDE VIEW

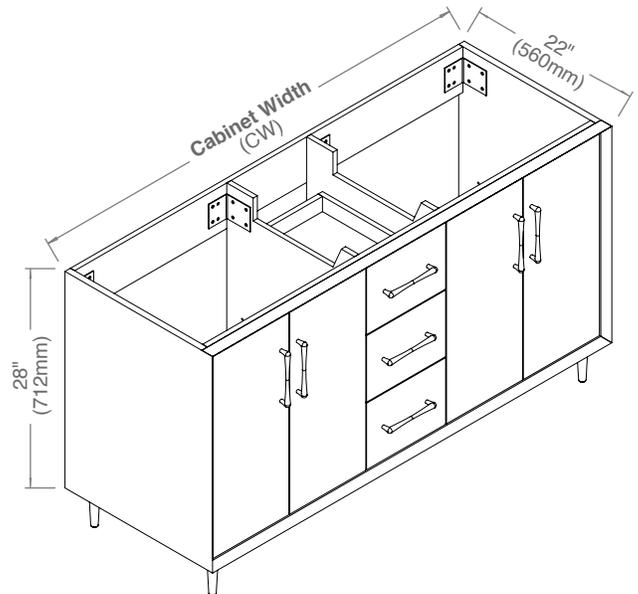

TOP VIEW

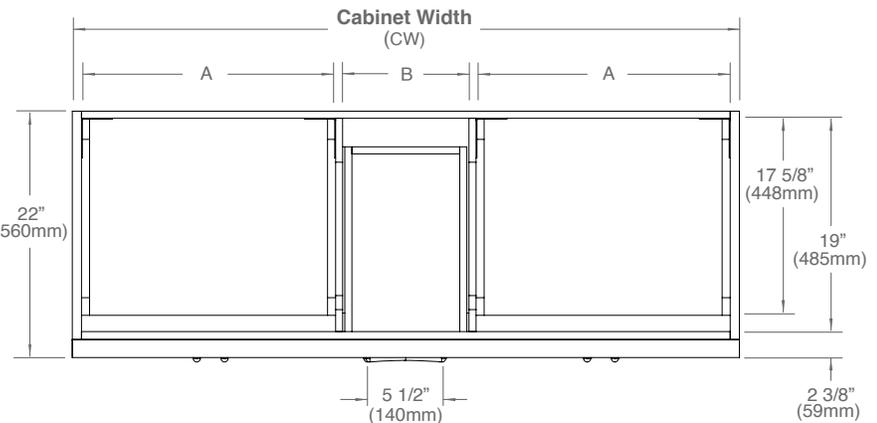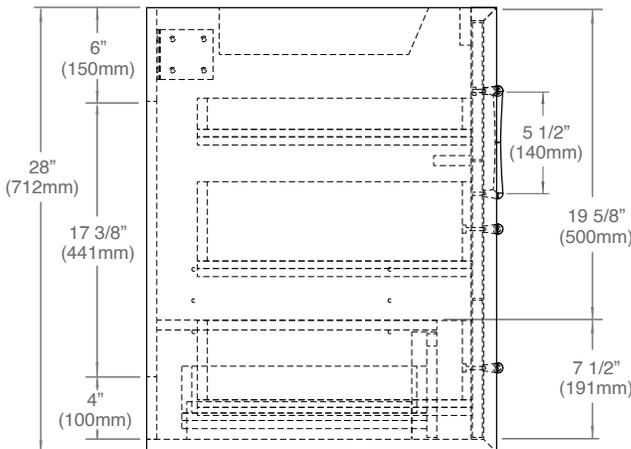

MODEL	CW	A	B	Handle C-C	Package Dimensions	Weight
B880/B890-60D-00X-XX	59 5/8" (1515mm)	22 3/4" (577mm)	11 1/4" (287mm)	5 1/2" (140mm)	64"(1626) x 26"(660) x 32 1/2"(826)	200 lbs / 91 Kgs
B880/B890-72D-00X-XX	71 5/8" (1820mm)	26 1/8" (665mm)	16 3/8" (417mm)	5 1/2" (140mm)	76"(1931) x 26"(660) x 32 1/2"(826)	250 lbs/114 Kgs


For clarification, please contact Madeli Customer Care at (800) 819-6988 Ext.1 or service@madeli.com

All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice. Find latest revision on madeli.com.

Eco - WALL HUNG VANITY


Installation Guide

TYPICAL INSTALLATION

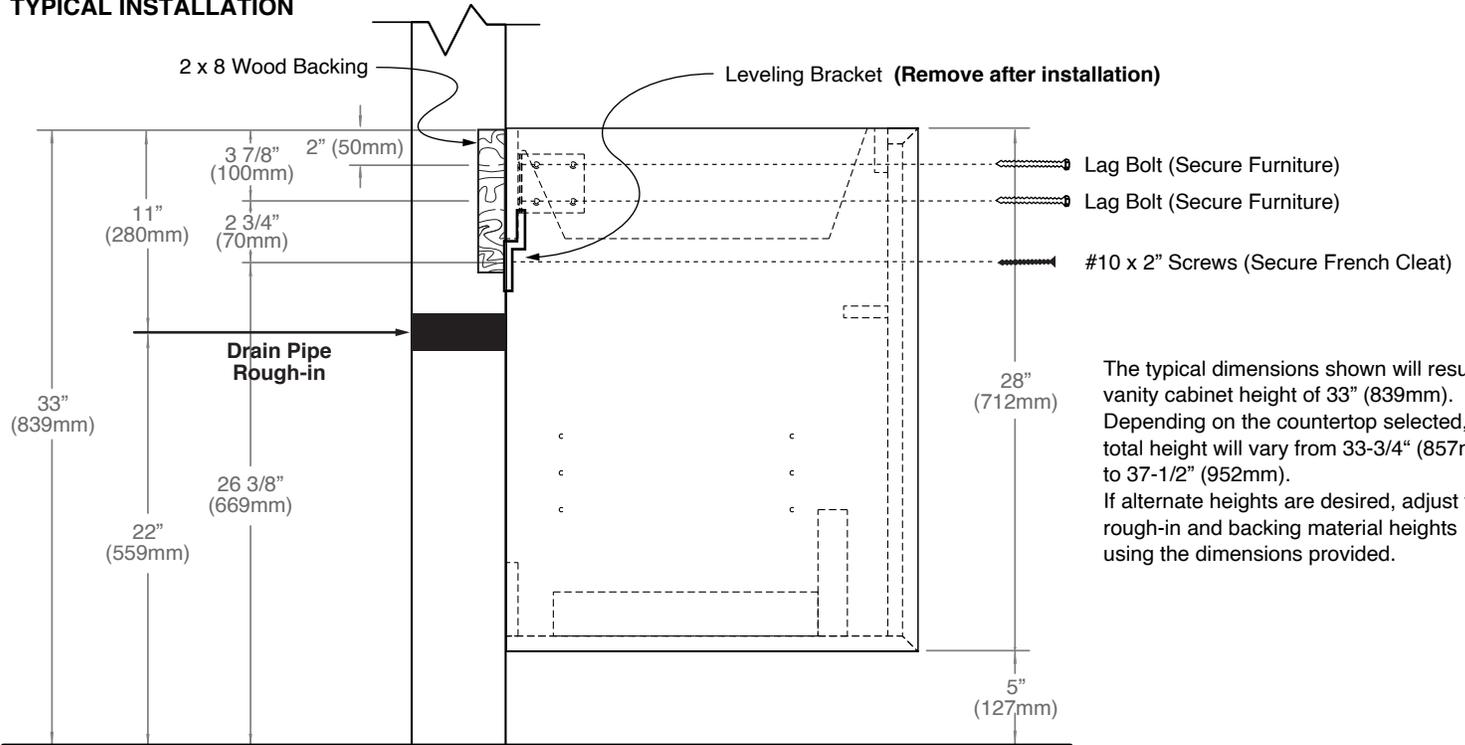


The typical dimensions shown will result in vanity cabinet height of 33" (839mm). Depending on the countertop selected, the total height will vary from 33-3/4" (857mm) to 37-1/2" (952mm). If alternate heights are desired, adjust the rough-in and backing material heights using the dimensions provided.

ACCESSORIES FOR INSTALLATION

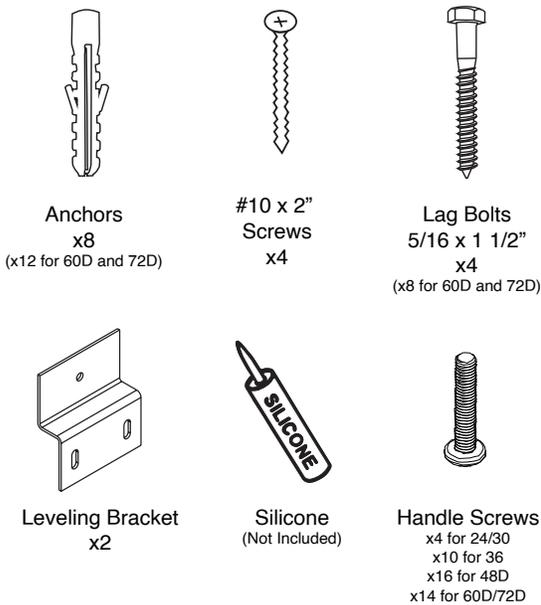

WALL PREPARATION

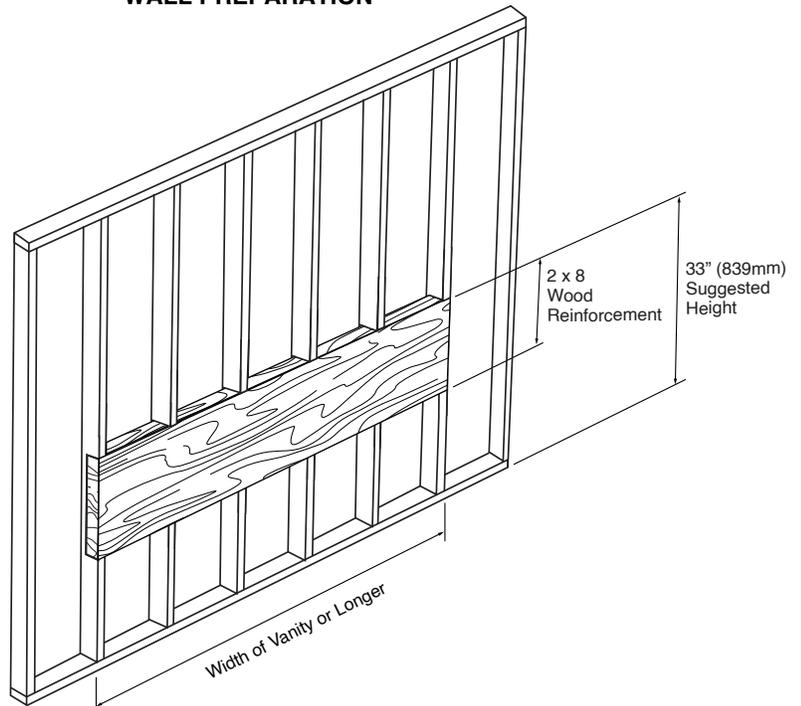



For clarification, please contact Madeli Customer Care at (800) 819-6988 Ext.1 or service@madeli.com

All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice. Find latest revision on madeli.com.

Eco - WALL HUNG VANITY

Installation Guide

STEP 1: Install leveling brackets on studs.

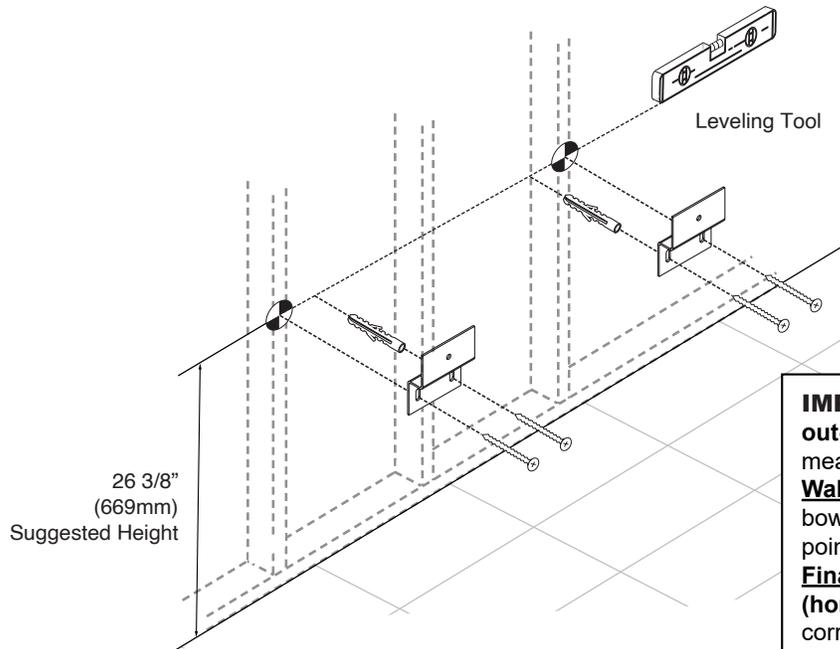


IMPORTANT: Field installation conditions often include **out-of-plumb walls** and **uneven floors**, requiring corrective measures for proper alignment.


Walls: Use **shims** to compensate for irregularities such as bowing or deviation from plumb. Position shims behind mounting points to achieve a true vertical and horizontal plane.

Final Check: Ensure the vanity is both **level and straight (horizontal)** and **plumb (vertical)** before securing. Failure to correct these conditions may result in misalignment, stress on joints, and compromised installation integrity.

STEP 2: Remove all the door panels, drawers and shelves.

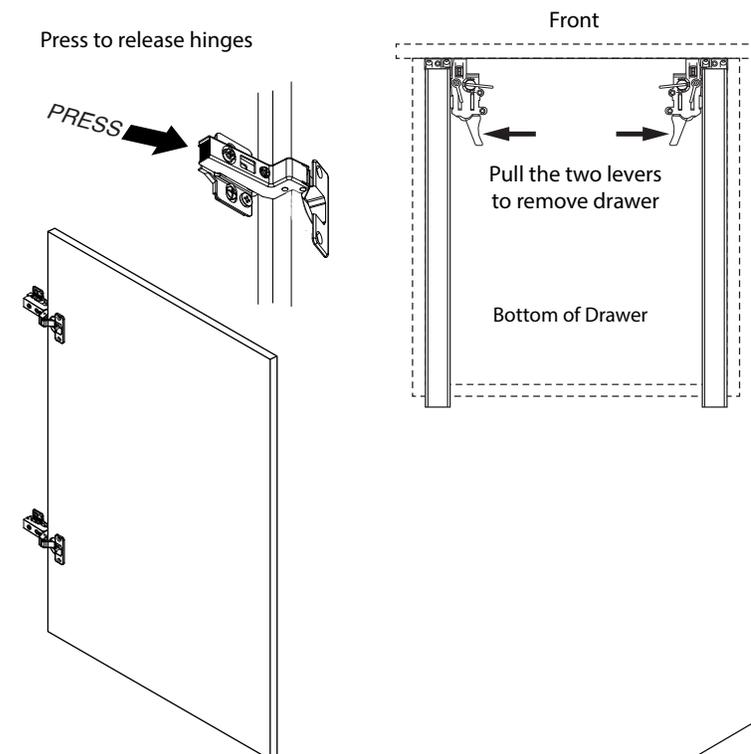

STEP 3: Place vanity on leveling bracket.

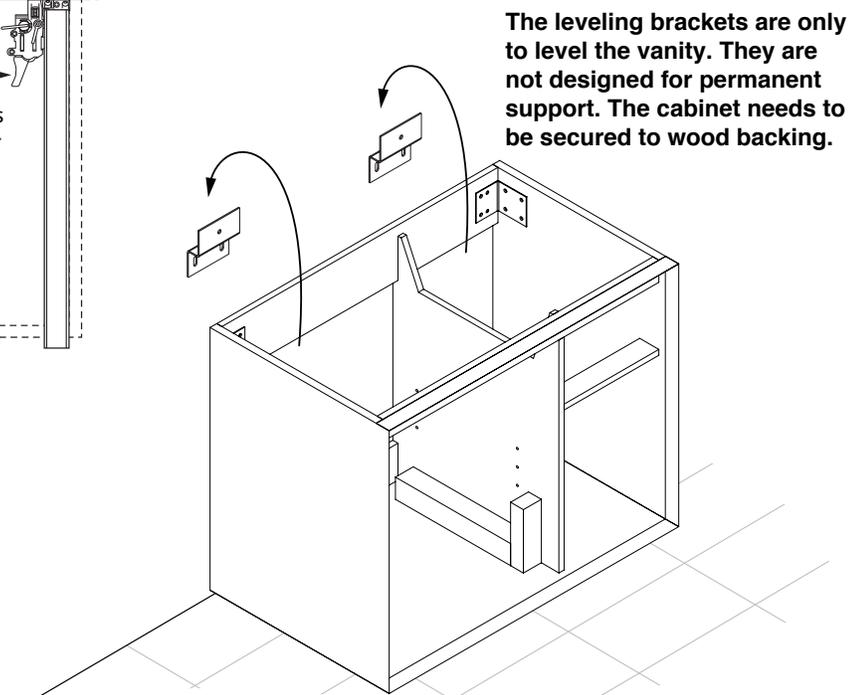

For clarification, please contact Madeli Customer Care at (800) 819-6988 Ext.1 or service@madeli.com

All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice. Find latest revision on madeli.com.

07 | Page


Eco - WALL HUNG VANITY

Installation Guide

STEP 3: Secure vanity to wood reinforcement backing.


4 Lag Bolts for
24, 30, 36 and 48C

Make sure the back of the cabinet is leveled and straight before securing it to the wall studs or wood backing if available.

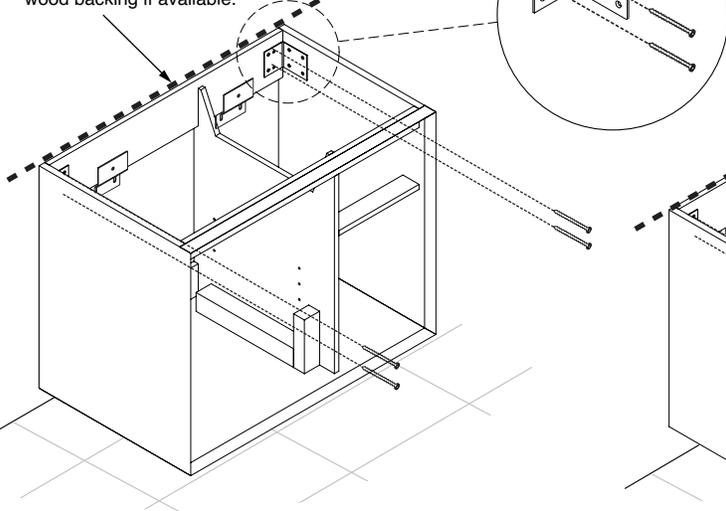


8 Lag Bolts for
Sizes 60D and 72D

Make sure the back of the cabinet is leveled and straight before securing it to the wall studs or wood backing if available.

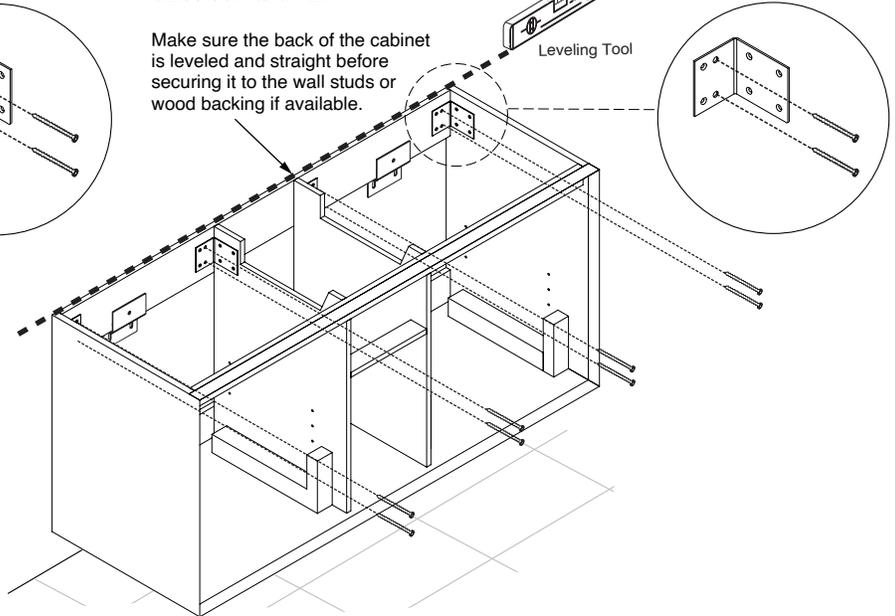

STEP 4: Install countertop with silicone as shown below.

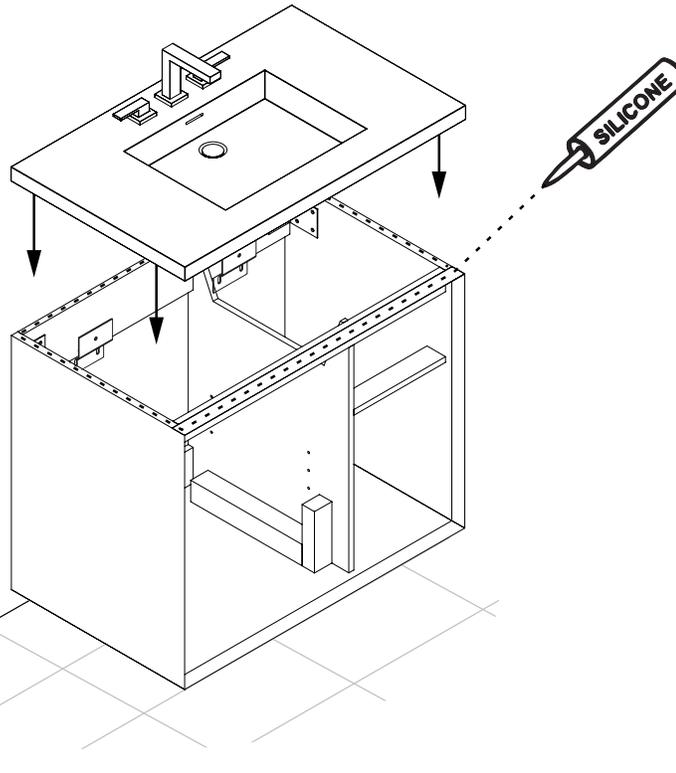


For clarification, please contact Madeli Customer Care at (800) 819-6988 Ext.1 or service@madeli.com

All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice. Find latest revision on madeli.com.


Homage - FREE STANDING VANITY

Feet Installation

LR05 FEET

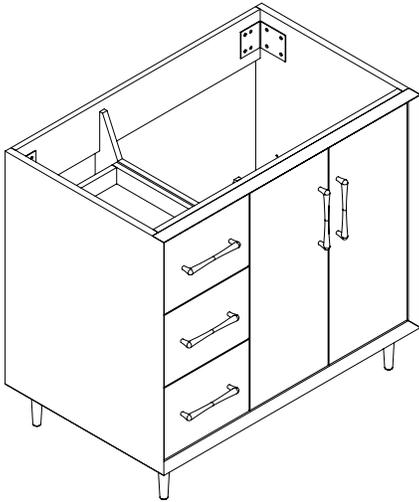

LY05 FEET

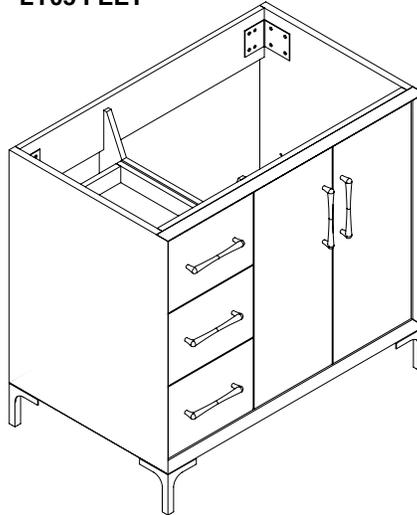




FEET/BASE INSTALLATION

1. Flip cabinet in the upside down position.
2. Mark screw locations using legs/base as template.
3. Pre-drill holes with 5/64", 3/32" or 7/64" drill bit about 1/2" deep.
4. Using provided screws, fix legs/base to cabinet as shown below.



If using a regular battery drill, set clutch to minimum and increase setting as needed.

DO NOT OVER TIGHTEN THE SCREWS. DOING SO WILL SPLIT THE WOOD SIDE PANEL.

LR05 FEET INSTALLATION

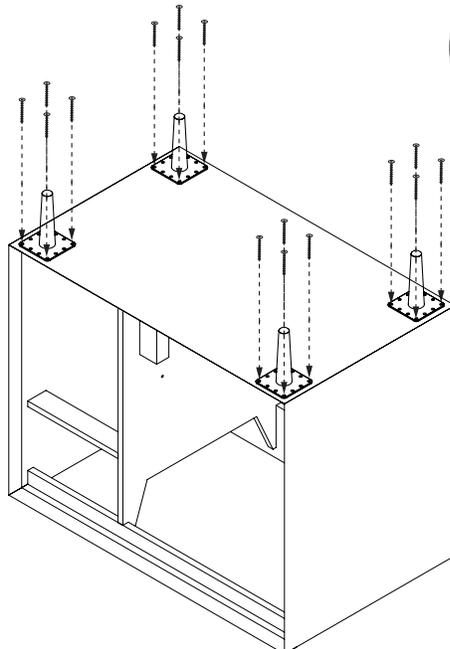

LY05 FEET INSTALLATION

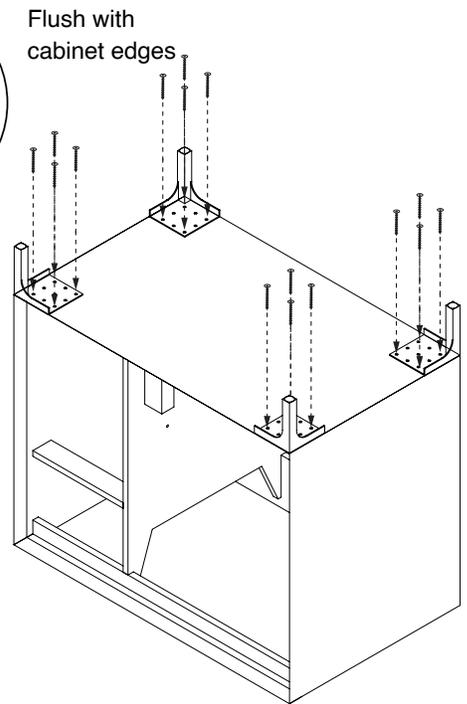


For clarification, please contact Madeli Customer Care at (800) 819-6988 Ext.1 or service@madeli.com

All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice. Find latest revision on madeli.com.

Homage - FREE STANDING VANITY

Installation Guide

TYPICAL INSTALLATION

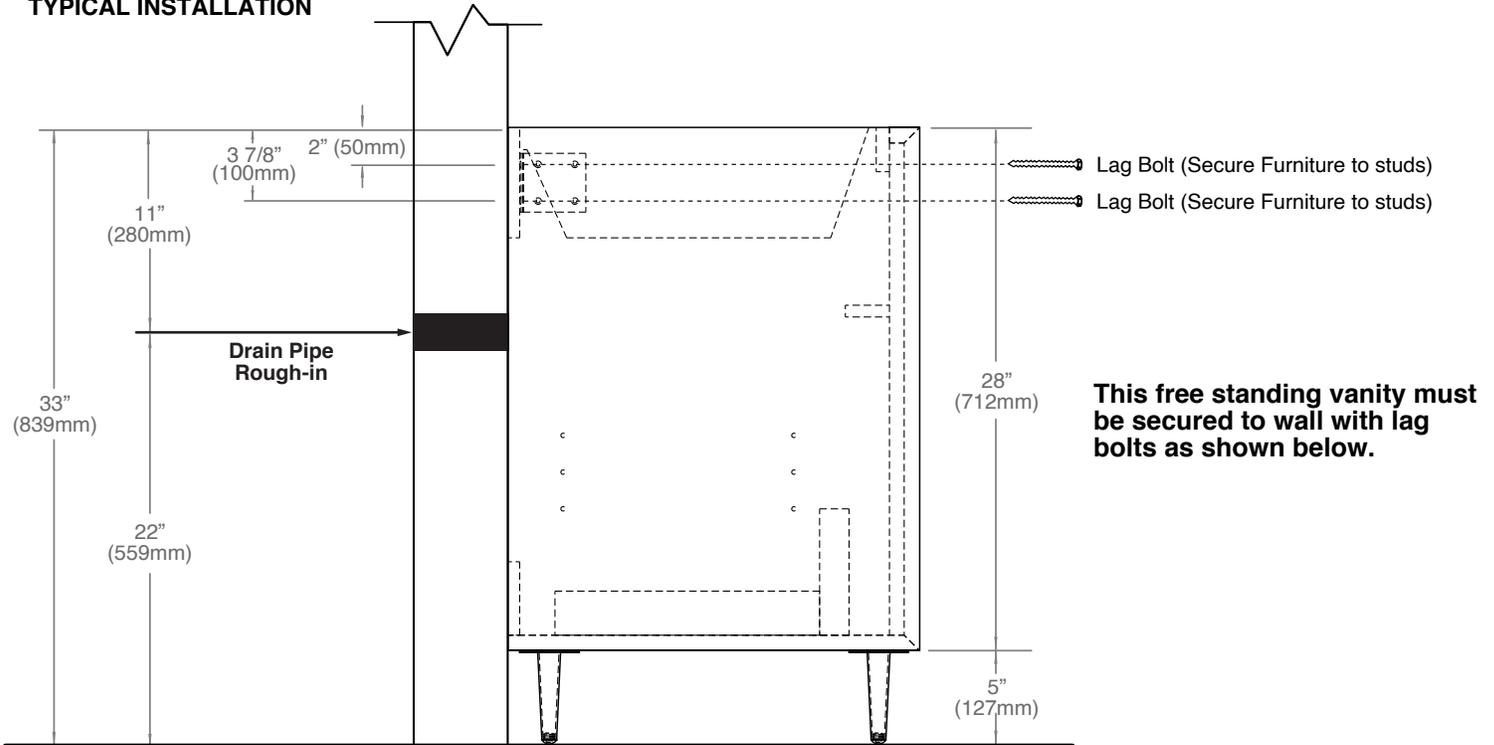


SECURE CABINET TO WALL

See step 4 (page 8) for countertop installation

4 Lag Bolts for 24, 30, 36 and 48C
8 Lag Bolts for Sizes 60D and 72D

Make sure the back of the cabinet is leveled and straight before securing it to the wall studs or wood backing if available.

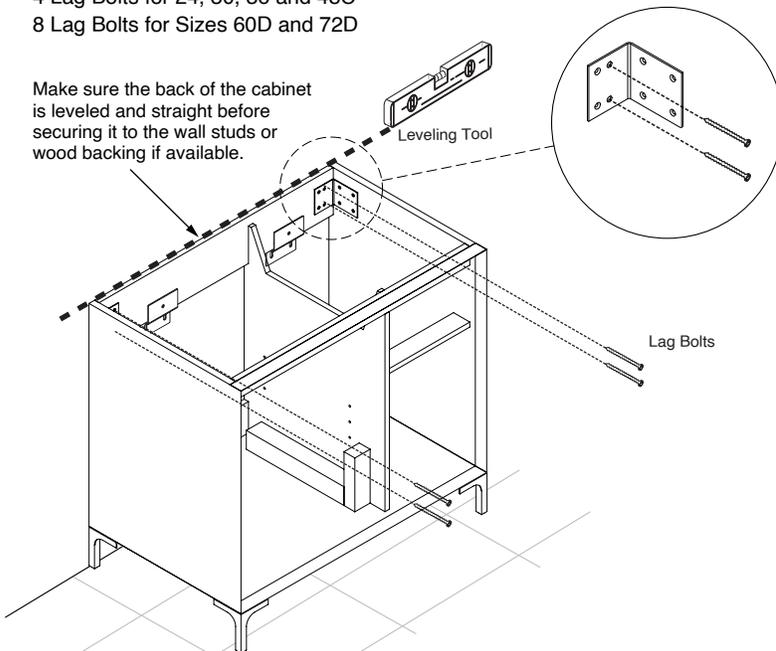

IMPORTANT: Field installation conditions often include **out-of-plumb walls** and **uneven floors**, requiring corrective measures for proper alignment.

Walls: Use **shims** to compensate for irregularities such as bowing or deviation from plumb. Position shims behind mounting points to achieve a true vertical and horizontal plane.

Floors: Utilize **provided adjustable leveling leg** to correct floor slope or height variations. Confirm leg adjustment with a level across the cabinet base and back.

Final Check: Ensure the vanity is both **level and straight (horizontal)** and **plumb (vertical)** before securing. Failure to correct these conditions may result in misalignment, stress on joints, and compromised installation integrity.

For clarification, please contact Madeli Customer Care at (800) 819-6988 Ext.1 or service@madeli.com

All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice. Find latest revision on madeli.com.


10 | Page

Homage - FREE STANDING VANITY


Center (Adjustable) Feet Installation

ALL FREESTANDING VANITIES - 48" TO 72" - MUST BE INSTALLED USING THE CENTER LEG


1. Turn the adjustable leg in order to contract it completely.




2. Follow steps 3 to 5 on page 10 to install the four corner legs. Then, install the center leg at the center of the cabinet and 10" from the front of the cabinet as shown below.

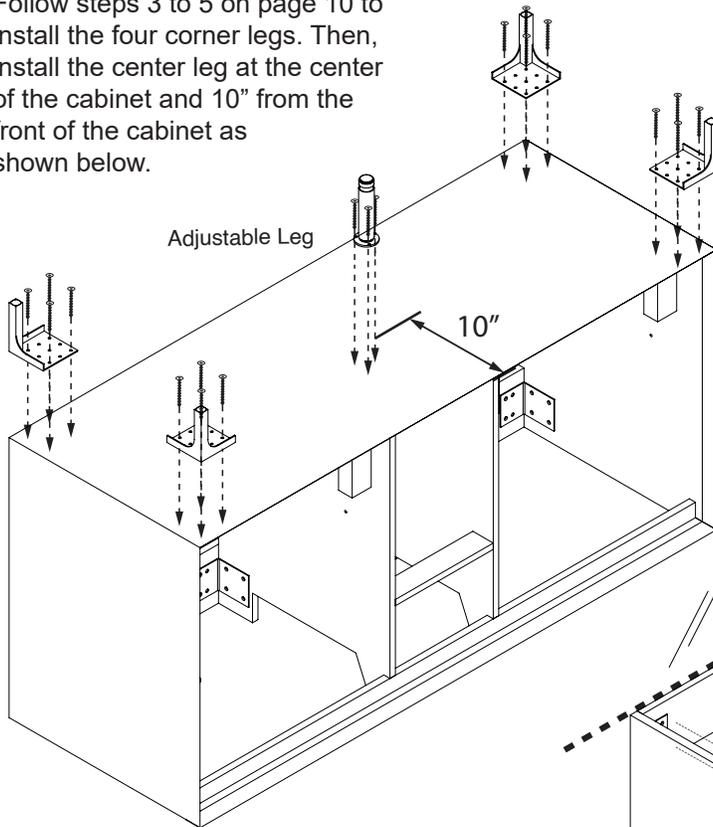

3. Make sure the back of the cabinet is leveled and straight before securing it to the wall studs or wood backing if available.

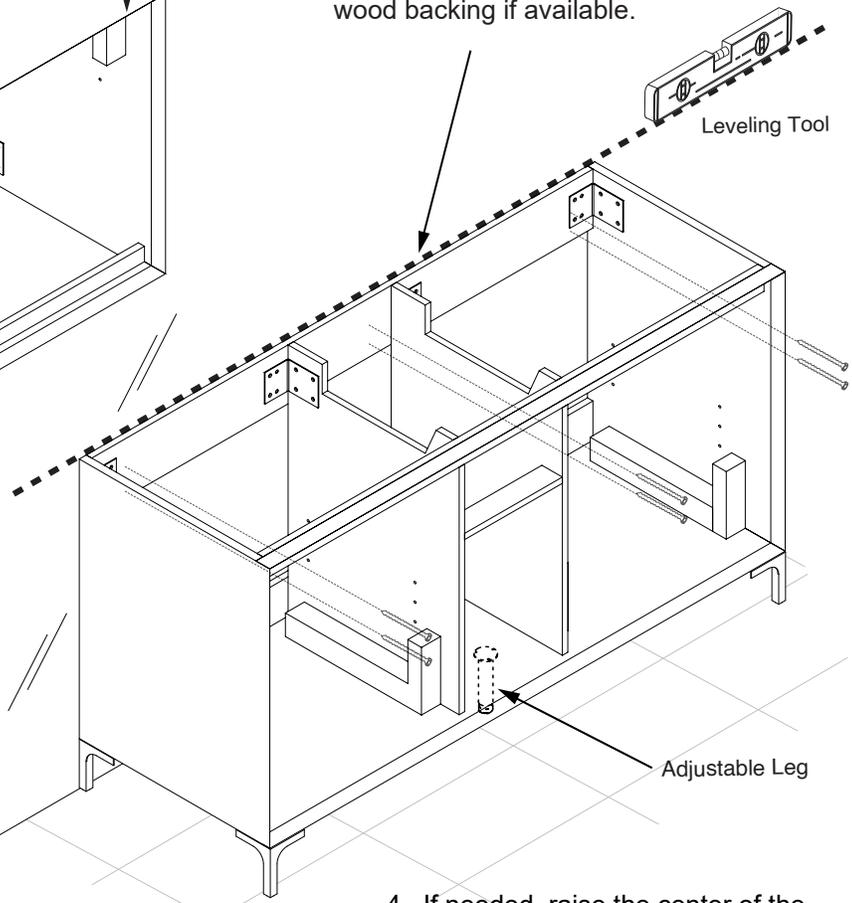

5. Turn the adjustable leg or uncrew it in order to expand it and to raise the cabinet as needed.




4. If needed, raise the center of the cabinet before securing the center to the wall using the adjustable leg as shown in step 5.


Homage - FREE STANDING VANITY

Installation Guide

HANDLE INSTALLATION

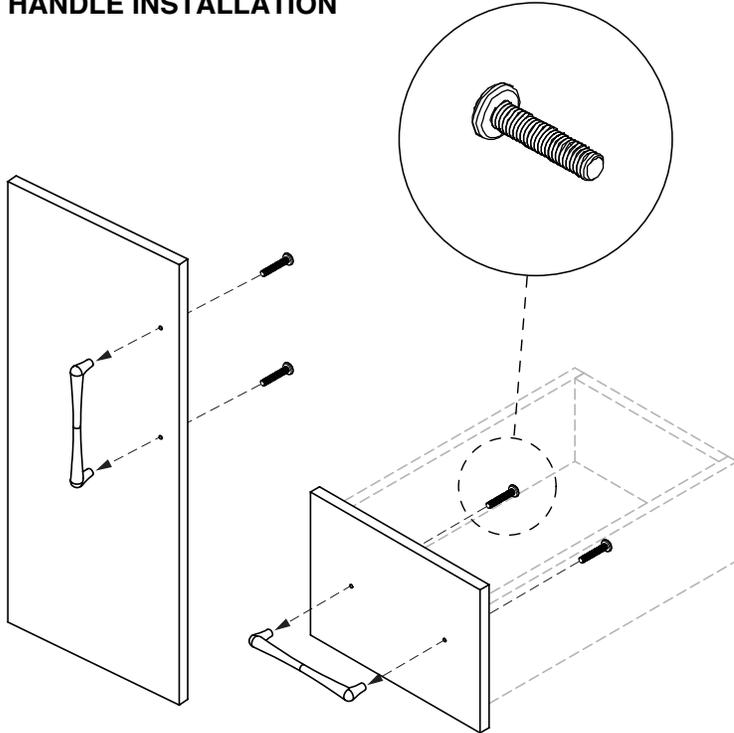


HINGE ADJUSTMENT

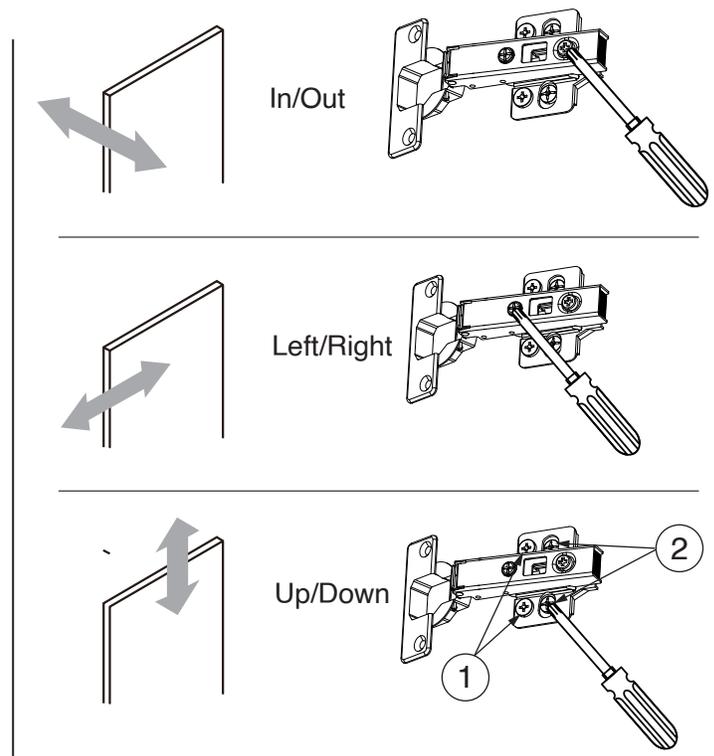

DRAWER ADJUSTMENT

Bottom View of Drawer

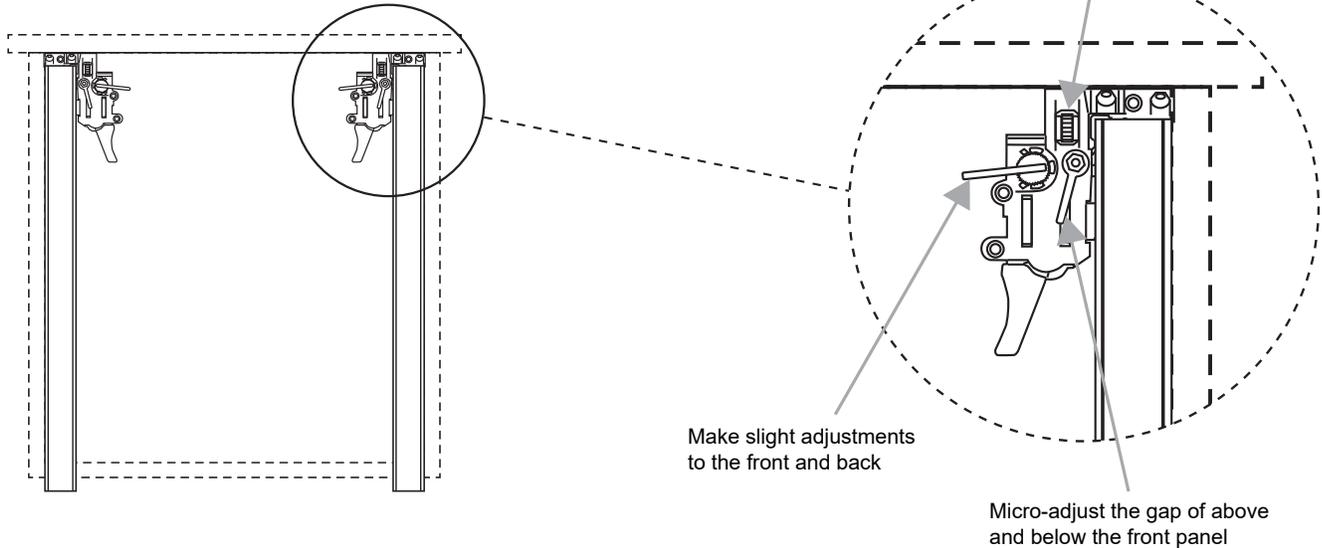

For clarification, please contact Madeli Customer Care at (800) 819-6988 Ext.1 or service@madeli.com

All dimensions are approximate and subject to standard tolerance. Specifications subject to change without prior notice. Find latest revision on madeli.com.